


Replanning 24 March 1987

Takeshi Shimizu

By

6

3

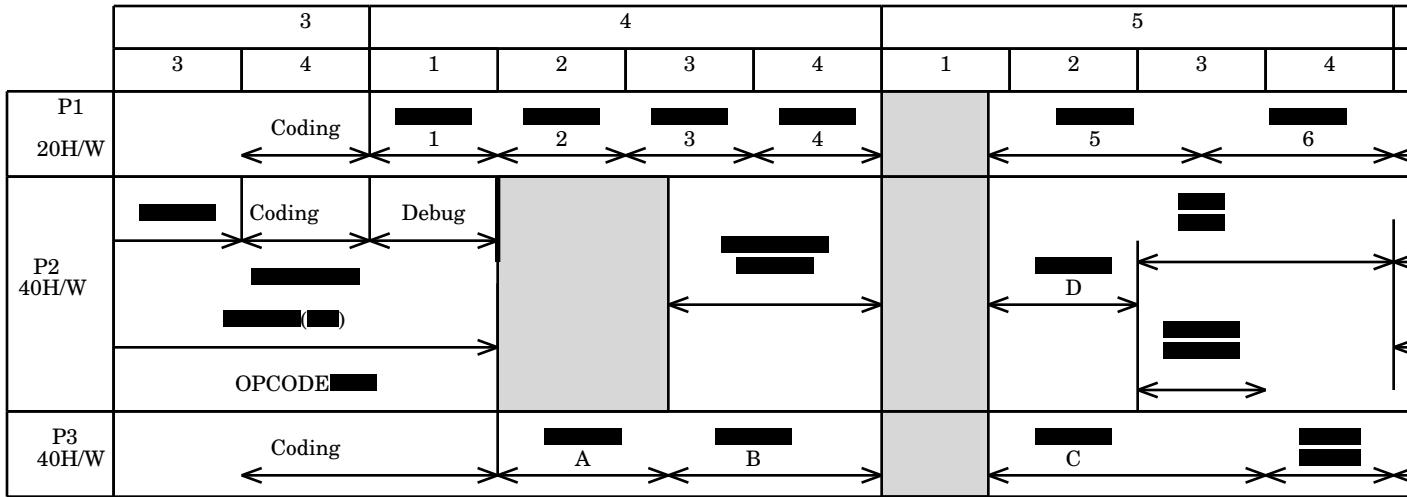

1 = { vars.c, vars2.c, binds.c, jump.c, arith.c }

2 = { lowlevel.c }

3 = { vars3.c }

4 = { gvar2.c }

5 = { fvar.c }

6 = { gc.c }

= { initdatatype.c , makeatom.c , array.c }

A = { typeof.c, constants.c, OP_eq, OP_copy , OP_atomcellN }

B = { conspage.c , stack.c }

C = { car-cdr.c }

D = { funcall.c }

= READ,PRINT,LOADER